



TCC

SECURITY ENGINEERING

Think Wise Move Tactical

ICOM

MADE IN JAPAN

CARGO VESSEL
CPA: 15 NM
TCPA: 12 min

TUG BOAT
CPA: 0.8 NM
TCPA: 8 min

SAILING YACHT
CPA: 2.2 NM
TCPA: 18 min

IC-M94DE

AIS TRAFFIC INFO, NOW IN YOUR HAND

VHF MARINE TRANSCEIVER WITH DSC & AIS RECEIVER



BUILT-IN AIS RECEIVER

Display real-time AIS target information on the screen and make AIS target calls.



DSC CLASS-H DISTRESS SYSTEM

Dedicated **DISTRESS** button and DSC for your safety at sea.



INTEGRATED GPS / GNSS RECEIVER

Supports position tracking, navigation and waypoints.



1500mW LOUD AUDIO

Powerful and clear audio in noisy marine environments.



6W RF OUTPUT POWER

Reliable long range communication with high transmission power.



IPX7 WATERPROOF + FLOAT'N FLASH

Floats on water and flashes with LED and beeps for easy recovery.



AIS RECEIVER	DSC EMERGENCY	GPS NAVIGATION	1500mW AUDIO	FLOAT'N FLASH TECHNOLOGY	MARINE SAFETY



AUTHORIZED ICOM DISTRIBUTOR IN EGYPT



TCC

SECURITY ENGINEERING

Think Wise Move Tactical



01035255557



info@tcc-eg.com



www.tcc-eg.com



TCC

SECURITY ENGINEERING

Think Wise Move Tactical

ICOM

MADE IN JAPAN

BUILT FOR PROFESSIONAL MARINE OPERATIONS



COMMERCIAL SHIPPING



OFFSHORE PLATFORMS



SEARCH & RESCUE



YACHT OPERATIONS



COAST GUARD



LONG RANGE NAVIGATION

KEY FEATURES

- ✓ AIS Receiver & AIS Target Call Function
- ✓ DSC Class-H System
- ✓ Dedicated Distress Button
- ✓ Integrated GPS Receiver
- ✓ Navigation Function with Waypoints
- ✓ Up To 50 Stored Waypoints
- ✓ Active Noise Cancelling
- ✓ Float'n Flash Technology
- ✓ MOB Auto Set Function
- ✓ AquaQuake™ Water Draining Function
- ✓ Dual Watch & Tri Watch
- ✓ Favorite Channel Function
- ✓ 4-Digit Channel Support
- ✓ IPX7 Waterproof Protection
- ✓ MIL-STD-810G Rugged Construction



AIS TARGET CALL FROM RADIO



DSC CLASS-H COMPLIANT



INTEGRATED GPS / GNSS



1500mW LOUD AUDIO



6W RF OUTPUT POWER



IPX7 WATERPROOF

TECHNICAL SPECIFICATIONS

Frequency Range	156.000 - 163.425 MHz
Channels	VHF Marine Channels
RF Output Power	6W / 1W
AIS Receiver	Built-in (AIS Class B)
DSC	Class-H
GPS / GNSS	GPS / GLONASS / SBAS
Audio Output	1500mW (typ.)
Waterproof Rating	IPX7 (1m depth / 30 min)

Battery	BP-306 Li-Ion 2400mAh
Battery Life (Approx.)*	Up To 10 Hours (Tx/Rx/Stby = 5:5:90)
Dimensions (W x H x D)	60.9 x 145.8 x 43.8 mm
Weight (Approx.)	357 g (12.6 oz)
Operating Temperature	-20°C to +55°C
Antenna Impedance	50 Ω
Display	Color TFT LCD


* Depending on battery condition and usage.

SUPPLIED ACCESSORIES (May differ depending on the version)



BP-306 BATTERY PACK BC-251 CHARGER AC ADAPTER BC-123SA MB-133 BELT CLIP FA-SC59V ANTENNA HAND STRAP

OPTIONAL ACCESSORIES

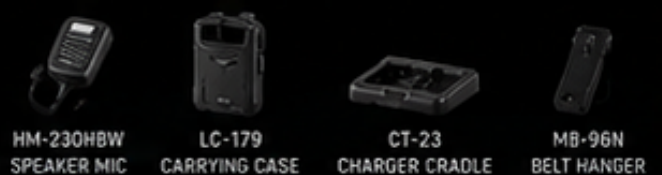

HM-230HBW SPEAKER MIC LC-179 CARRYING CASE CT-23 CHARGER CRADLE MB-96N BELT HANGER



LET'S STAY CONNECTED

Scan the QR code to visit our website and discover more solutions.



AUTHORIZED ICOM DISTRIBUTOR



GENUINE PRODUCTS



TECHNICAL SUPPORT



AFTER-SALES SERVICE



MARINE COMMUNICATION SPECIALISTS